




(DY、DYJ型)

**产品概述**

本公司生产的DY型多级离心输油泵系本公司根据市场调研而开发成功的最新产品。经各大油田的使用证明具有高效节能，结构紧凑，运转平稳可靠，寿命长，维修工作量少等特点。产品效率符合GB/13007-91标准，是各油田、油站、锅炉给水的理想产品。

DY型多级离心输油泵流量范围25-200m<sup>3</sup>/h，扬程40-500m，转速1450-2950r/min，功率15-220kw，使用温度-10℃-110℃

**型号意义**

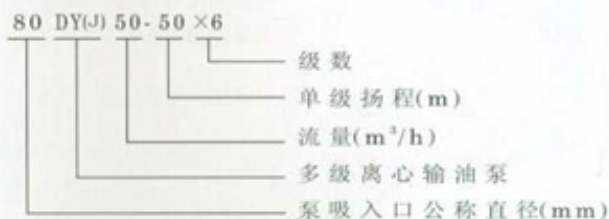

**性能参数**

泵型号	级数	流量Q		扬程H (m)	转速n (r/min)	轴功率Pa (kw)	电机功率(kw)	效率η (%)	必需汽蚀余量(m)
		m <sup>3</sup> /h	L/S						
50DY30-36	2	30	8.33	72	2950	9.80	15	60	3.1
	3	30	8.33	108		14.70	22	60	3.1
	4	30	8.33	144		19.61	30	60	3.1
	5	30	8.33	180		24.51	37	60	3.1
	6	30	8.33	216		29.41	37	60	3.1
	7	30	8.33	252		34.31	45	60	3.1
	8	30	8.33	288		39.31	55	60	3.1
	9	30	8.33	324		44.11	55	60	3.1
	80DY50-50	2	50	13.89		100	2950	20.02	30
3		50	13.89	150	30.03	37		68	3.0
4		50	13.89	200	40.04	45		68	3.0
5		50	13.89	250	50.05	55		68	3.0
6		50	13.89	300	60.06	75		68	3.0
7		50	13.89	350	70.07	90		68	3.0
8		50	13.89	400	80.08	90		68	3.0
9		50	13.89	450	90.09	110		68	3.0
100DY100-60		2	100	27.8	120	2950		45.4	55
	3	100	27.8	100	58.0		75	72	5.0
	4	100	27.8	240	90.0		110	72	5.0
	5	100	27.8	300	113.5		132	72	5.0

泵型号	级数	流量Q		扬程H (m)	转速n (r/min)	轴功率Pa (kw)	电机功率(kw)	效率η (%)	必需汽蚀余量(m)
		m <sup>3</sup> /h	L/S						
100DY100-60	6	100	27.8	360	2950	136.2	160	72	5.0
	7	100	27.8	420		158.6	200	72	5.0
	8	100	27.8	480		181.6	200	72	5.0
	9	100	27.8	540		204.3	220	72	5.0
	2	90	25	43.2		1450	14.4	22	74
3	90	25	64.8	21.6	30		74	3.4	
4	90	25	86.4	28.8	45		74	3.4	
5	90	25	108	36.0	55		74	3.4	
6	90	25	130	43.2	75		74	3.4	
7	90	25	151	50.4	75		74	3.4	
8	90	25	173	57.6	90		74	3.4	
9	90	25	194	64.8	90		74	3.4	
150DY155-30	2	155	43	60	1450		32.9	45	77
	3	155	43	90		49.3	75	77	3.5
	4	155	43	120		65.8	90	77	3.5
	5	155	43	150		82.2	110	77	3.5
	6	155	43	190		98.7	132	77	3.5
	7	155	43	210		115.1	160	77	3.5
	8	155	43	240		131.6	160	77	3.5
	9	155	43	270		148.0	220	77	3.5