



XBD-L型
(消防泵)

QDL型
(稳压泵)

GDL型
(生活泵)

性能参数

型号	流量 (m³/h)	扬程 (m)	吸程 (m)	电机功率 (kW)
25GDL2-12×3	2	36	7.5	1.1
25GDL2-12×4	2	48	7.5	1.1
25GDL2-12×5	2	60	7.5	1.5
25GDL2-12×6	2	72	7.5	1.5
25GDL2-12×7	2	84	7.5	2.2
25GDL2-12×8	2	96	7.5	2.2
25GDL2-12×9	2	108	7.5	2.2
25GDL2-12×10	2	120	7.5	3
25GDL2-12×11	2	132	7.5	3
25GDL2-12×12	2	144	7.5	3
25GDL4-11×3	4	33	7.5	1.1
25GDL4-11×4	4	44	7.5	1.5
25GDL4-11×5	4	55	7.5	2.2
25GDL4-11×6	4	66	7.5	2.2
25GDL4-11×7	4	77	7.5	3
25GDL4-11×8	4	88	7.5	3
25GDL4-11×9	4	99	7.5	3
25GDL4-11×10	4	110	7.5	4
25GDL4-11×11	4	121	7.5	4
25GDL4-11×12	4	132	7.5	4
25GDL4-11×13	4	143	7.5	4
40GDL6-12×3	6	36	7.5	1.5
40GDL6-12×4	6	48	7.5	2.2
40GDL6-12×5	6	60	7.5	2.2
40GDL6-12×6	6	72	7.5	3
40GDL6-12×7	6	84	7.5	3
40GDL6-12×8	6	96	7.5	4
40GDL6-12×9	6	108	7.5	4
40GDL6-12×10	6	120	7.5	4
40GDL6-12×11	6	132	7.5	5.5
40GDL6-12×12	6	144	7.5	5.5
50GDL12-15×2	12	30	7	2.2
50GDL12-15×3	12	45	7	3
50GDL12-15×4	12	60	7	4
50GDL12-15×5	12	75	7	5.5
50GDL12-15×6	12	90	7	5.5
50GDL12-15×7	12	105	7	7.5
50GDL12-15×8	12	120	7	7.5
50GDL12-15×9	12	135	7	11
50GDL12-15×10	12	150	7	11
50GDL18-15×3	18	45	7	4
50GDL18-15×4	18	60	7	5.5
50GDL18-15×5	18	75	7	7.5
50GDL18-15×6	18	90	7	7.5
50GDL18-15×7	18	105	7	11
50GDL18-15×8	18	120	7	11


产品概述

该泵是最新泵型,具有节能、占地面积小、安装方便、性能稳定等特点。外套用1Cr18Ni9Ti优质不锈钢,轴封用耐磨机械密封,无泄漏、使用寿命长。以水力平衡解决轴向力,因而泵运转平稳、低噪音,安装条件优于DL型泵,可以简便安装于任一段水平管路中间。完全能满足高层建筑、深井矿等的给排水及消防设施需要,是各大行业冷热水或一般介质、理化性质类似于水等液体输送的最佳泵型。

使用温度: < 100℃

压力: < 1.6MPa (16kg/cm²)

型号意义

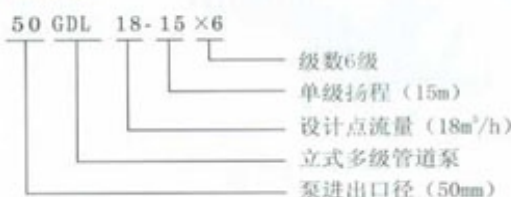

型号	流量 (m³/h)	扬程 (m)	吸程 (m)	电机功率 (kW)
50GDL18-15×9	18	135	7	15
50GDL18-15×10	18	150	7	15
65GDL24-12×2	24	24	6	3
65GDL24-12×3	24	36	6	4
65GDL24-12×4	24	48	6	5.5
65GDL24-12×5	24	60	6	7.5
65GDL24-12×6	24	72	6	7.5
65GDL24-12×7	24	84	6	11
65GDL24-12×8	24	96	6	11
65GDL24-12×9	24	108	6	15
65GDL24-12×10	24	120	6	15
80GDL36-12×2	36	24	5.5	4
80GDL36-12×3	36	36	5.5	5.5
80GDL36-12×4	36	48	5.5	7.5
80GDL36-12×5	36	60	5.5	11
80GDL36-12×6	36	72	5.5	11
80GDL36-12×7	36	84	5.5	15
80GDL36-12×8	36	96	5.5	15
80GDL36-12×9	36	108	5.5	18.5
80GDL36-12×10	36	120	5.5	18.5
80GDL54-14×2	54	28	5	7.5
80GDL54-14×3	54	42	5	11
80GDL54-14×4	54	56	5	15
80GDL54-14×5	54	70	5	18.5
80GDL54-14×6	54	84	5	18.5
80GDL54-14×7	54	98	5	22
100GDL72-14×2	72	28	4.5	11
100GDL72-14×3	72	42	4.5	15
100GDL72-14×4	72	56	4.5	18.5
100GDL72-14×5	72	70	4.5	22
100GDL72-14×6	72	84	4.5	30
100GDL72-14×7	72	98	4.5	30
125GDL100-20×2	100	40	4.5	18.5
125GDL100-20×3	100	60	4.5	30
125GDL100-20×4	100	80	4.5	37
125GDL100-20×5	100	100	4.5	45
125GDL100-20×6	100	120	4.5	55
125GDL100-20×7	100	140	4.5	75
125GDL100-20×8	100	160	4.5	75
125GDL100-20×9	100	180	4.5	75
125GDL100-20×10	100	200	4.5	90
150GDL160-20×2	160	50	4.5	37
150GDL160-20×3	160	75	4.5	55
150GDL160-20×4	160	100	4.5	75
150GDL160-20×5	160	125	4.5	90
150GDL160-20×6	160	150	4.5	110
150GDL160-20×7	160	175	4.5	110